

[Old Version using WEP](#)

Setup of the UNIBZ Wireless LAN for Linux WPA

Security used within the WLAN Network:	WPA/WPA2 + PEAP + MSCHAPv2
--	----------------------------

- Wireless Network SSID: **ScientificNetworkSouthTyrol**
- Security: **WPA/WPA 2 Enterprise**
- Authentication: **Protected EAP (PEAP)**
- Inner Authentication: **MSCHAPv2**
- Certificate: **Thawte Premium Server CA**
- Username: **<unibz-login>**
- Password: **<unibz-password>**
- IP Address: **Automatic (DHCP)**


Pre-requisites

- Drivers for your Wireless Adapter and Requirements, installed and configured.
1. Intel PRO/Wireless 2100 802.11b (Centrino) <http://ipw2100.sourceforge.net/>
 2. Intel PRO/Wireless 2200 802.11g and 2915 802.11ag (Centrino) <http://ipw2200.sourceforge.net/>
 3. Intersil PrismII driver with HostAP mode <http://hostap.epitest.fi/>
 4. Atheros MADWiFi driver (most cards with 802.11a or 108 Mb/s) <http://madwifi.org/>
 5. WLAN Cards using ndiswrapper
http://ndiswrapper.sourceforge.net/mediawiki/index.php/Main_Page
- Linux Software for the Authentication: [wpa_supplicant](#). It is a WPA Supplicant with support for WPA and WPA2 (IEEE 802.11i/RSN)
 - A good Networkmanager GUI and front-end of wpa_supplicant is [NetworkManager](#). A list of [Supported Wireless Cards & Drivers](#) is also available. A wiki about NetworkManager can be found in section [Using NetworkManager](#)

Other Wireless LAN resources for Linux can be found here

http://www.hpl.hp.com/personal/Jean_Tourrilhes/Linux/

(K)(X)Ubuntu 9.10 Using NetworkManager

 Connection name:

☒ Connect automatically

☐ System connection

Wireless

Wireless Security

IP Address

SSID:

Scan

Mode: Infrastructure

▼

BSSID:

Restrict To Interface: Any

▼


MTU:

Automatic

↕

✔ OK

✖ Cancel

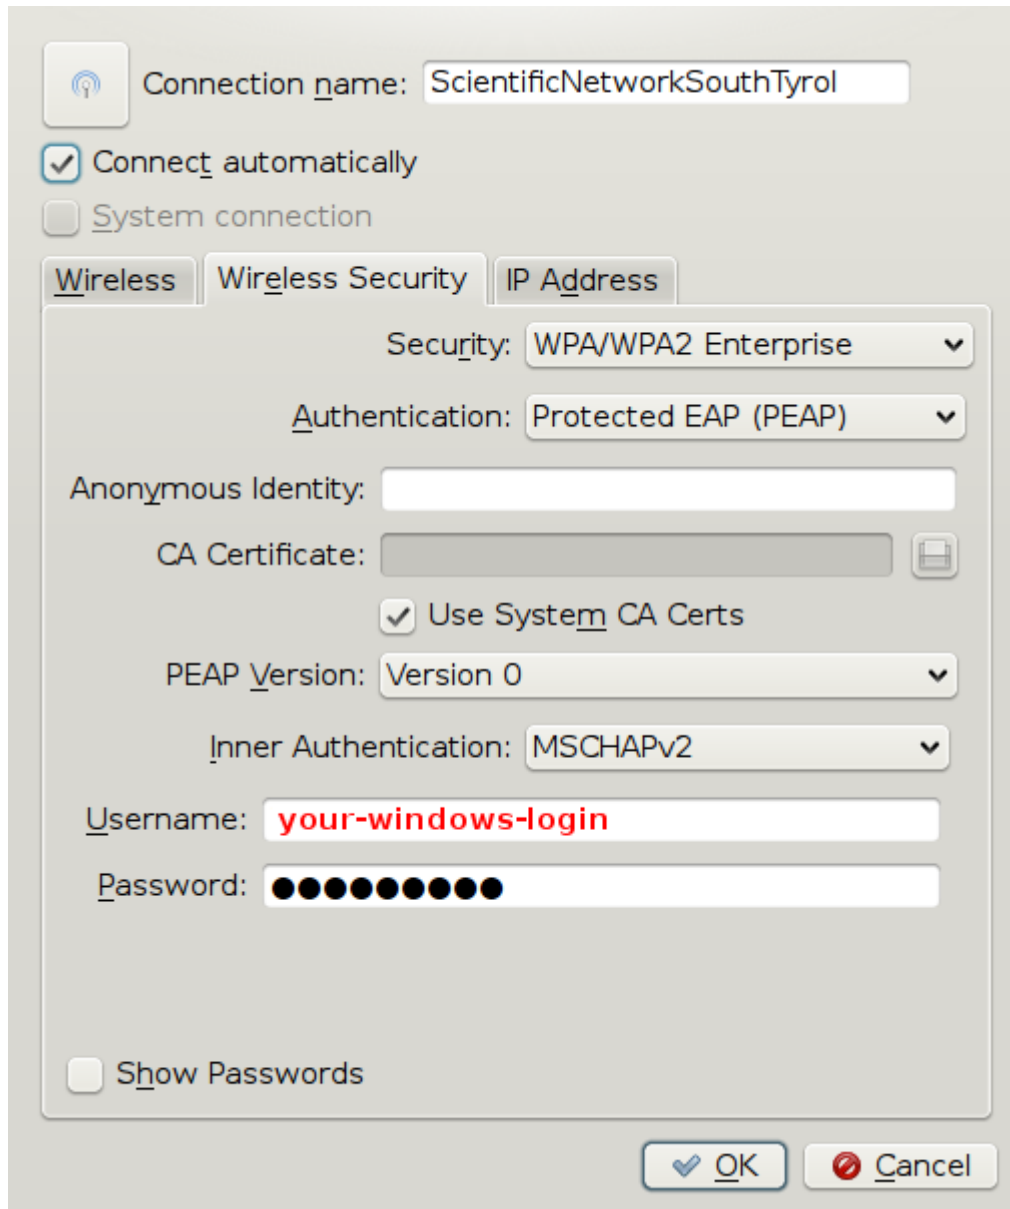

The image shows a 'Wireless Security' configuration window. At the top, there is a 'Connection name' field with the value 'ScientificNetworkSouthTyrol'. Below it, there are two checkboxes: 'Connect automatically' (checked) and 'System connection' (unchecked). The 'Wireless Security' tab is selected, showing settings for 'Security' (WPA/WPA2 Enterprise), 'Authentication' (Protected EAP (PEAP)), 'Anonymous Identity' (empty), 'CA Certificate' (empty with a file icon), 'Use System CA Certs' (checked), 'PEAP Version' (Version 0), 'Inner Authentication' (MSCHAPv2), 'Username' (your-windows-login), and 'Password' (masked with dots). There is also a 'Show Passwords' checkbox at the bottom left. At the bottom right, there are 'OK' and 'Cancel' buttons.

Connection name: ScientificNetworkSouthTyrol

☒ Connect automatically

☐ System connection

Wireless | **Wireless Security** | IP Address

Security: WPA/WPA2 Enterprise

Authentication: Protected EAP (PEAP)

Anonymous Identity:

CA Certificate:

☒ Use System CA Certs

PEAP Version: Version 0

Inner Authentication: MSCHAPv2

Username: **your-windows-login**

Password:

☐ Show Passwords

OK Cancel

The image shows a NetworkManager connection configuration window. At the top, there is a connection icon and the name 'ScientificNetworkSouthTyrol'. Below this, there are two checkboxes: 'Connect automatically' (checked) and 'System connection' (unchecked). There are three tabs: 'Wireless' (selected), 'Wireless Security', and 'IP Address'. The 'Wireless' tab is active, showing a 'Configure:' dropdown menu set to 'Automatic (DHCP)'. Below this are input fields for 'IP Address:', 'Subnet Mask:', and 'Gateway:'. There are also 'Search Domains:' and 'DNS Servers:' fields, each followed by a button with three dots. At the bottom right, there are 'OK' and 'Cancel' buttons.

Links:

[NetworkManager Howto](#)

(K)(X)Ubuntu < 9.10 Manually

Installing wpa_supplicant

1. apt-get install wpa_supplicant
2. Configure /etc/wpa_supplicant.conf

Download [Thawte Premium_server_CA.pem](#) Certificate if you do not have it!

less /etc/wpa_supplicant.conf

```
ctrl_interface=/var/run/wpa_supplicant
ctrl_interface_group=0
eapol_version=1
ap_scan=1
fast_reauth=1

network={
    disabled=0
    ssid="ScientificNetworkSouthTyrol"
    proto=WPA
    key_mgmt=WPA-EAP
    auth_alg=OPEN
    eap=PEAP
    identity="unibzlogin@unibz.it"
    password="unibzpassword"
    ca_cert="/etc/ssl/certs/Thawte_Premium_Server_CA.pem"
    phase1="peaplabel=0 peapver=0"
    phase2="auth=MSCHAPV2"
    priority=10
}
```

3. Bring Interface (eth1/wlan, etc.) up

```
sudo ifconfig eth1 up
```

4. Start wpa_supplicant

```
sudo wpa_supplicant -D wext -i eth1 -c /etc/wpa_supplicant.conf
```

5. Get an IP Address

```
sudo dhclient3 eth1
```

Configuration for Wired Authentication 802.1x (Cable)

This is the same Authentication Method as Wireless, but here we use an Ethernet cable.


Using Network Manager

Try this first if you are using a Ubuntu ⇒ 11.10.

Network Manager has the ability to be configured for 802.1x Authentication.

Basic steps:

- Click on the Network Symbol (2 Arrows) in the upper right task-bar (either with left/right mouse click)
- Edit Connections... in Network Manager
- In the first Tab: Wired press Add Button
- Fill out Connection name: <hostel>
- Go to 2nd tab 802.1X Security, tick: Use 802.1X security for this connection
- Authentication: Protected EAP (PEAP)
- CA certificate: Thawte_Premium_Server_CA (located in /etc/ssl/certs/Thawte_Premium_Server_CA.pem)
- PEAP version: Automatic
- Inner authentication: MSCHAPv2
- Username: <your-unibz-login>
- Password: <your-unibz-password>
- Save...
- Click again on the Network Symbol and choose the newly create Connection

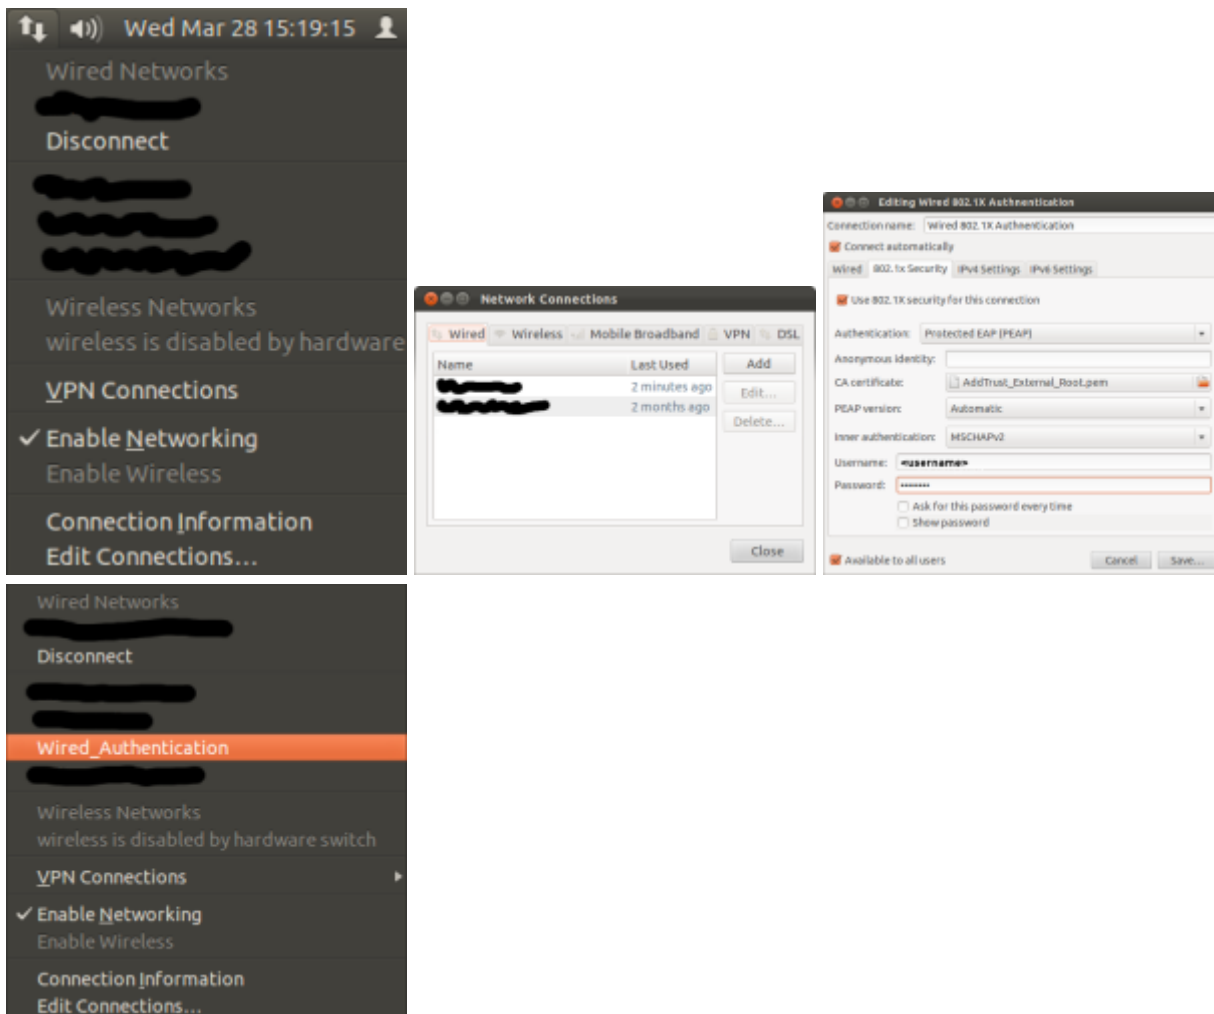

Manual Configuration

For the more “experienced” users!!

Make sure you have installed wpa_supplicant and wpagui

```
sudo apt-get install wpa_supplicant wpa_gui
```

Edit the configuration file: /etc/wpa_supplicant/wpa_supplicant.conf

```
vi /etc/wpa_supplicant/wpa_supplicant.conf
```

```
ctrl_interface=/var/run/wpa_supplicant
ctrl_interface_group=0
eapol_version=1
ap_scan=0
fast_reauth=1

network={
    eap=PEAP
    eapol_flags=0
    phase1="peaplabel=0"
    phase2="auth=MSCHAPV2"
    priority=10
    key_mgmt=IEEE8021X
    auth_alg=OPEN
}
```

Now execute the following commands:

Starts wpa_supplicant with wired driver (-D wired) and in daemon mode (-B)

- `sudo wpa_supplicant -D wired -c /etc/wpa_supplicant/wpa_supplicant.conf -i eth0 -B`

Start wpa_gui to enter username and password

- `sudo wpa_gui`
- Login with username@unibz.it and password

Get an IP Address

- `sudo dhclient3 eth0`

— [kohofer](#) 2010/02/22 14:38

From:
<https://wiki.inf.unibz.it/> - **Engineering-Tech Wiki**

Permanent link:
https://wiki.inf.unibz.it/doku.php?id=public:wireless_lan_using_linux&rev=1332942429

Last update: **2019/01/16 10:03**

